


Straight push-in connector

stainless steel

STAINLESS STEEL

Art. No. 110420

Type No. 47.006 ES

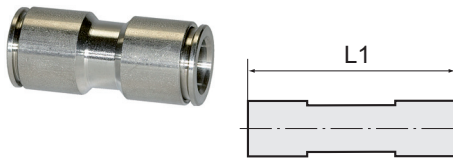

Exemplary illustration

For use with aggressive media and in areas susceptible to corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

Discontinued product. No longer available. New product 135243 (847.006 ES)

Technical data

| | |
|--------------------------|------------------------|
| Working pressure | max. 15 bar |
| Working pressure pulsate | 10 bar |
| Operating temperature | -20 to 150 °C |
| Medium temperature | -20 to 150 °C |
| Material | Stainless steel 1.4404 |
| Sealant | FKM |
| For tube O.D. 1 | 6 mm |
| For tube O.D. 2 | 6 mm |
| L1 | 34.0 mm |
| Suitable pipe materials | PVDF, PTFE, PA, PU |

The maximum working pressure depends on the pipe quality.

The medium and operating temperature depends on the pipe quality and diameter.


Commercial data

| | |
|-------------------------|--------------|
| Customs tariff number | 73071990 |
| Country of origin | IT |
| eCl@ss 5.1.4 | 27294201 |
| eCl@ss 9.0 | 27294201 |
| UNSPSC_Code_v190501 | 27131613 |
| UNSPSC_CodeDesc_v190501 | Air coupling |

Material informations

| | |
|----------------------------|----------------------------|
| REACH SVHC1 substance name | no |
| CAS no. SVHC 1 | no CAS No. |
| RoHS materials notice | RoHS compliant |
| REACH Info | no SVHC substance included |

Dimensions



| For tube O.D. 1 | For tube O.D. 2 | L1 | D1 |
|-----------------|-----------------|------|------|
| mm | mm | mm | mm |
| 6 | 6 | 34.0 | 12.0 |