


Push-in L-fitting

stainless steel

STAINLESS STEEL

Art. No. 135135

Type No. 843.038-14 ES

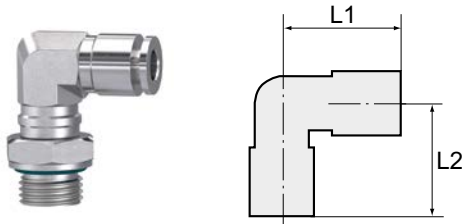

Exemplary illustration

For use in more aggressive environments and corrosive media.
The suitability test for the individual application is the user's responsibility.

Technical data

| | |
|-------------------------|--|
| Working pressure | -0.98 - 20 bar |
| Operating temperature | -20 to 150 °C |
| Medium temperature | -20 to 150 °C |
| Material | Stainless steel 1.4404 |
| Medium | Compressed air,corrosive media (if compatible with material) |
| Sealant | FPM |
| Applications | Compressed air syst.,chemical and food, pharma, pack.,vacuum |
| Thread form | Parallel male thread |
| Standard thread | DIN EN ISO 228-1 |
| Version | With o-ring (FPM) |
| Design | Swivel type |
| Thread | G 3/8 |
| For tube O.D. | 14 mm |
| L1 | 28.7 mm |
| L2 | 35.4 mm |
| a/f | 22 mm |
| a/f 1 | 22 mm |
| Suitable pipe materials | PVDF, PTFE, PA, PU |

The suitability test for the use with alternative specifications is the user's responsibility.


Commercial data

| | |
|-------------------------|--------------|
| Customs tariff number | 73072910 |
| Country of origin | IN |
| eCl@ss 5.1.4 | 27294201 |
| eCl@ss 9.0 | 27294201 |
| UNSPSC_Code_v190501 | 27131613 |
| UNSPSC_CodeDesc_v190501 | Air coupling |

Material informations

| | |
|----------------------------|----------------------------|
| REACH SVHC1 substance name | no |
| CAS no. SVHC 1 | no CAS No. |
| RoHS materials notice | RoHS compliant |
| REACH Info | no SVHC substance included |

Dimensions



| Thread | Standard thread | For tube O.D. | F | a/f | a/f 1 | L1 | L2 | D1 |
|--------|------------------|---------------|-----|-----|-------|------|------|------|
| | | mm | mm | mm | mm | mm | mm | mm |
| G 3/8 | DIN EN ISO 228-1 | 14 | 7.5 | 22 | 22 | 28.7 | 35.4 | 21.8 |

Accessories

| | Art. No. | Type No. |
|---|----------|----------|
| Loosening tool, quick-connect fittings, hose exterior Ø 4-14 mm | 121863 | LW4-14 |