

# Spiral hose coupling set

Spiral hose, polyamide, PA12

**MAX** |||

Art. No. 158141

Type No. SP81000PADSK



Exemplary illustration

For safe and effective flow.

Thanks to their small coil diameter, they are compact, easy to handle and lightweight.

Not suitable for direct attachment to pulsating tools.

We recommend using our vibration dampers, according to ISO 6150 § 7.1.

## Technical data


Operating temperature	-20 to 70 °C
Max. operating pressure at 23 °C	12 bar
Hose size	8x6 mm
No. of coils	49
Service length max.	10.0 m
Material	Polyamide, PA12
Shore hardness	65D
Coil O.D.	90 mm

with pushbutton-type safety coupling DN 7.4 and push-in plug, galvanised steel

## Commercial data

Customs tariff number	39173300
Country of origin	CN
eCl@ss 5.1.4	27294101
eCl@ss 9.0	27294190
UNSPSC_Code_v190501	40142002
UNSPSC_CodeDesc_v190501	Air hoses

## Service length

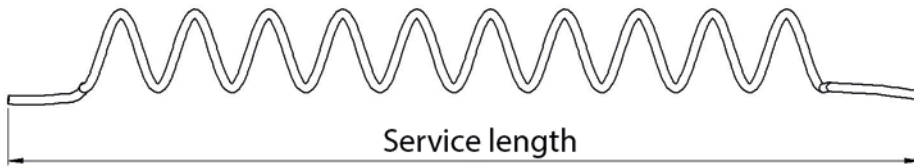

The service length is the maximum permissible extension (limit value).  
After exceeding the limit value, a permanent deformation can occur.

## Spareparts

	Art. No.	Type No.
Nipple for I.D. 7.2 - 7.8, hardened / galv. steel, G 1/4 IT	107551	243.55 ST
Spiral hose, Fitting, Polyamide, R 1/4, Hose Ø 8x6, 10.0 m	158117	SP81000PA
Pushbutton safety coupling I.D. 7.4, G 1/4 IT	199979	DKSKIG14