



Metal bowl

With bowl guard

## Combination service units

Size 2

**811.13 to 811.16**

G 3/4 (red.) to G 1

0.5 to 10 bar

0.5 to 16 bar



### Characteristics

Type	811.13	811.14
Control range [bar]	0.5 to 10.0	0.5 to 16.0
Port	G 3/4 (red.)	
Type	811.15	811.16
Control range [bar]	0.5 to 10.0	0.5 to 16.0
Port	G 1	
Pressure gauge port	G 1/4	
Type of construction	- Centrifugal filter Sintered filter element - Diaphragm pressure regulator with self-relieving design - Proportional lubricator	
Input pressure p <sub>1</sub>	16 bar with plastic bowl 25 bar with metal bowl	
Input pressure p <sub>1</sub> with <b>automatic</b> drain	Min. 4 bar <b>Max. 16 bar</b>	
Control range p <sub>2</sub>	0.5 to 10 bar, 0.5 to 16 bar Other control ranges on request	
Mounting position	Vertical, drain plug at bottom	
Mounting type	Bracket and two screws	
Medium temperature	0 to 50 °C (other temperature ranges on request)	
Ambient temperature	0 to 90 °C (with metal container) 0 to 50 °C (other temperature ranges on request)	
Filter rating	40 µm	
Bowl capacity	<b>Filter:</b> Max. 75 cm <sup>3</sup> condensate <b>Oil-mist lubricator:</b> 150 cm <sup>3</sup>	
Condensate drain	Manual, fully automatic Semi-automatic on request	
Weight	2670	

### Materials

Part	Material
Head piece (body)	Z 410
Spring bonnet	PA
Diaphragm	NBR-brass
Pressure spring	Steel
Valve cone	NBR-brass
O-ring 42 x 3	NBR
O-ring 78 x 3	NBR
Filter element	Bronze
Condensate bowl / oil bowl	Polycarbonate
Oil fill plug	POM-NBR
Sight dome	PA

### Ordering information

Type      Port and control range      Options

**811.1X X**
**Order example: 811.15 K**

Port	
	See "Characteristics"
Options	
<b>K</b>	Plastic bowl
<b>M</b>	Metal bowl
<b>S</b>	Bowl guard

Please use the suffix »A« to order automatic drain

### Description

- Block design
- **Extremely compact design;** all devices combined in a single unit
- Pressure setting can be locked by pushing the knob down
- Pressure gauge Ø63 included
- Filter rating acc. to ISO 4022
- Oil can be filled under pressure

### Recommended oil

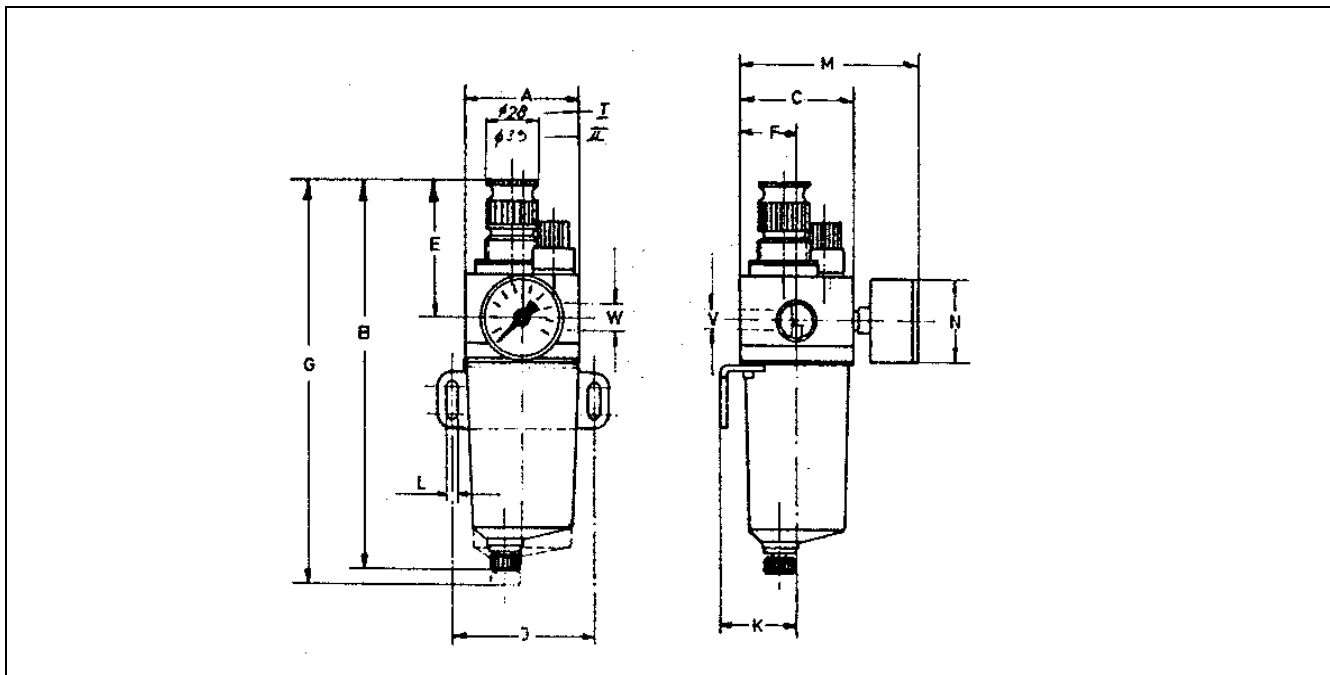
#### Special pneumatic oil 32

 Viscosity at 40°C: 32 cSt [mm<sup>2</sup>/s]

Temperature range: -35 to +85°C

Oil bowls made of plastic (polycarbonate) are corroded by additives, anti-freeze agents and synthetic oils. We therefore recommend using mineral oils from approx. 22 to 32 cSt or up to 68 cSt in conjunction with impact tools.

Metal bowls and metal sight domes should be used for all other oil grades as well as anti-freeze agents.

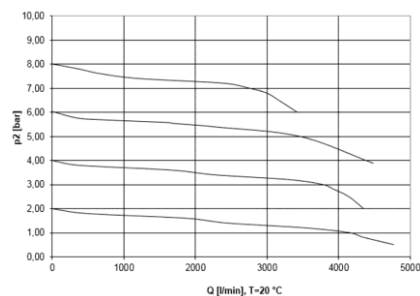

**Dimensions [mm]**

Port W	Dimensions					Maint. G	Mounting J	K	L	Pressure gauge		
	A	B	C	E	F					V	N	M
G1 (3/4 red.)	93.0 (97.0)	296.5	94.0	96.5	47.0	325.0	112.0	61.0	9.0	G 1/4	61.8	130.4

**Flow rates**

Flow rates measured under normal conditions

Art. No.		811.13 X	811.14 X
		811.15 X	811.16 X
Output pressure $p_2 = 6$ [bar]	Q m <sup>3</sup> /h	222	222
Nominal flow ( $\Delta p = 1$ bar)	Q l/min	3700	3700

**Flow characteristic**  $p_1 = 10$  bar

**Lubricator operating limit**

Input pressure $p_1$		1	2.5	4	6	10	16
Nominal flow ( $\Delta p = 1$ bar)	QN m <sup>3</sup> /h	5	7.5	9	10.5	13	16

**Accessories**

Designation	Order No.
Mounting bracket with two screws, compl.	H 11
Plastic bowl	E 14811/24
Metal bowl	E 14811/24 M
Bowl guard (metal)	SM 11
Automatic drain	65/0
Sight dome (metal)	1412.7.909
Sight dome (polycarbonate)	VZ 722

**Main spare parts**

Part	Part No.
<b>Set of wearing parts</b>	<b>22.811.4</b>
<b>Filter element 50 <math>\mu</math>m</b>	<b>811.6.950</b>
Sight dome, compl.	VZ 722
Pr. gauge G 1/4, $\varnothing 63$	
0 to 10 bar	217-KD
0 to 16 bar	218-KD