


»variobloc« Series





For removing unlubricated air when the manifold is flanged on upstream of the oil-mist lubricator. An integrated non-return valve prevents oil inflow from the oil-mist lubricator or the line.

- No. of outlets: 4 (all sealed on delivery)
- Outlets for G 1/4 and G 3/8: Top / bottom G 3/8  
Front / back G 1/4
- Outlets for G 1/2 and G 3/4: Top / bottom G 3/8 / G 1/2  
Front / back G 3/8 / G 1/2
- Flow rate measurement:  $P_1 = 6.0$  bar and pressure drop  $\Delta p = 1.0$  bar



Manifold												
Article No.	Ident No.	Port	A mm	B mm	C mm	F mm	J mm	K mm	ØL mm	U	W	
VV 22	100722	G 1/4	48.0	44.0	48.0	24.0	43.0	14.5	4.4	G 3/8	G 3/8	
VV 23	100723	G 3/8	48.0	44.0	48.0	24.0	43.0	14.5	4.4	G 3/8	G 3/8	
VV 24	100724	G 1/2	70.0	56.0	70.0	35.0	62.0	18.0	5.4	G 1/2	G 1/2	
VV 25	100725	G 3/4	70.0	56.0	70.0	35.0	62.0	18.0	5.4	G 1/2	G 1/2	
VV 26	100726	G 1	124.0	56.0	70.0	35.0	62.0	18.0	5.4	G 1/2	G 1/2	

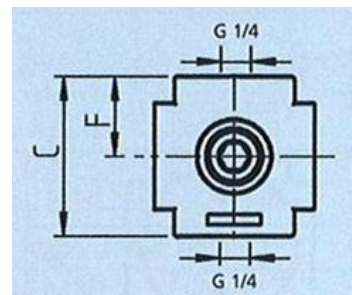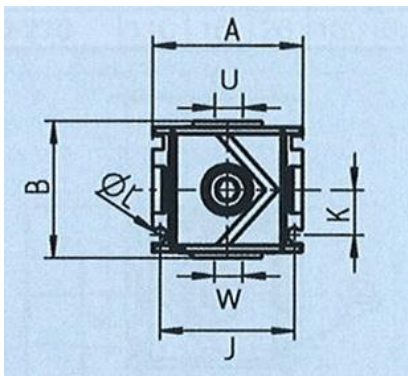

Flow rate:

