



Compact, low-price non-return valves with very low opening pressure.


Body: Brass
Slide: Polyether imide (PEI)
Sealant: NBR
Spring: Stainless steel
Opening pressure: 20 - 50 mbar
Operating temperature: -10 °C to +100 °C




1	Body
2	Socket
3	Slide
4	Seal
5	Spring




Art. No.	Type No.	Thread	DN mm	A mm	Ø B mm	CH mm	Kv	PN	Weight kg
103875	227.41	G 1/2	15	44.5	28.0	25	3.9	40	0.1
103876	227.42	G 3/4	20	47.5	34.5	31	5.2	40	0.2
103877	227.43	G 1	25	56.0	42.0	38	9.4	25	0.3
103878	227.44	G 1 1/4	32	62.0	52.0	48	14.5	25	0.4
103879	227.45	G 1 1/2	40	70.0	61.0	54	23.5	16	0.6
103880	227.46	G 2	50	78.0	73.0	67	33.5	16	0.9

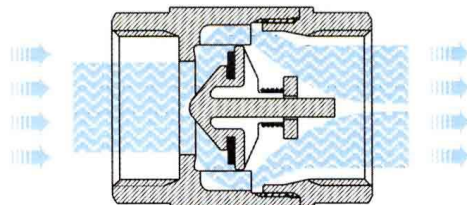

Pressure / temperature diagram

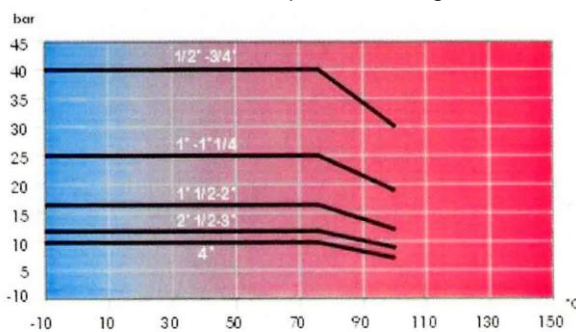

Flow rate diagram

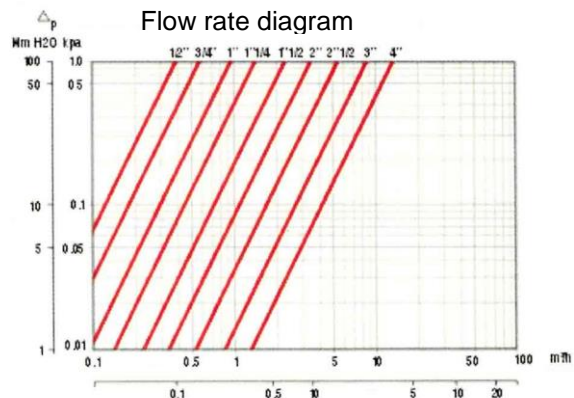

Strainer for check valves, with plastic thread

Art. No.	Type No.	Thread	Mesh size	Suitable for check valve Art. No.
134046	SKR-12-K	G 1/2	1.2	103875
134047	SKR-34-K	G 3/4	1.2	103876
134048	SKR-1-K	G 1	1.2	103877
134049	SKR-114-K	G 1 1/4	1.2	103878
134050	SKR-112-K	G 1 1/2	1.2	103879
134051	SKR-2-K	G 2	1.2	103879

SKR-1-K

