


Stainless steel, 3-piece - length acc. to DIN 3202-M3.

- | | |
|-----------------------|--|
| Housing | Stainless steel 1.4408 |
| Ball | Stainless steel 1.4401 |
| Ball seal | PTFE (15 % glass fibre reinforced) |
| Stem seal | PTFE |
| Hand lever | Stainless steel 1.4301, with plastic coating |
| Operating temperature | -20 °C to 180 °C |
| Standard thread | G thread acc. to DIN EN ISO 228-1, flange plate ISO 5211 |

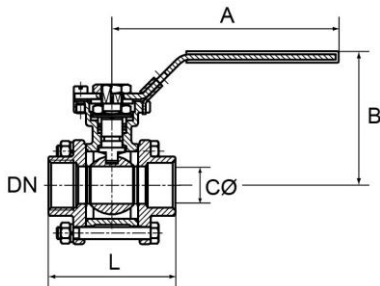

3390.05

Stainless steel ball valve, 3-piece, length acc. to DIN 3202-M3, with full bore

Art. No.	Type No.	Thread	DN	PN bar	L mm	A mm	B mm	C Ø mm	ISO 5211
135910	3390.01	G 1/4	8	63	60.0	125.0	68.5	10.5	F 03 / F 04
135911	3390.02	G 3/8	10	63	60.0	125.0	68.5	12.0	F 03 / F 04
135912	3390.03	G 1/2	15	63	75.0	125.0	77.5	15.0	F 03 / F 04
135913	3390.04	G 3/4	20	63	80.0	125.0	81.5	20.0	F 03 / F 04
135914	3390.05	G 1	25	63	90.0	150.0	88.5	25.0	F 04 / F 05
135915	3390.06	G 1 1/4	32	63	110.0	150.0	93.5	32.0	F 04 / F 05
135916	3390.07	G 1 1/2	40	63	120.0	190.0	113.5	38.0	F 05 / F 07
135917	3390.08	G 2	50	63	140.0	190.0	120.5	47.0	F 05 / F 07
135918	3390.09	G 2 1/2	65	40	185.0	350.0	125.0	64.0	F 07 / F 10
135919	3390.10	G 3	80	40	205.0	350.0	136.0	76.0	F 07 / F 10

