


- Straight-way type, mini series -

Material:	Nickel-plated brass (UNI EN12164 CW614)
Insert:	Brass
Ball:	AISI 420
O-ring:	NBR
Spring:	AISI 302
Medium temperature:	Max. 85 °C
Ambient temperature:	Max. 85 °C
Operating temperature:	-10 °C to 70 °C
Port:	R/Rp thread acc. to ISO 7-1

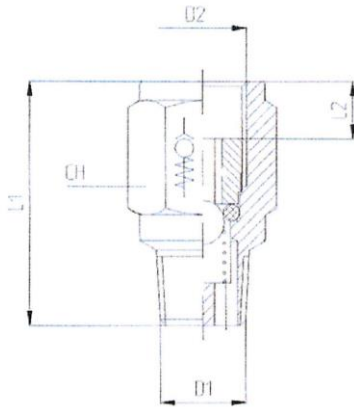

228.22

Type No.	Art. No.	D1	D2	L1	L2	CH	Flow rate (measured at 6 bar)	Min. opening pressure
228.11	103845	R/Rp 1/8	1/8	26.0	6.0	14	about 400 NI/min	0.15 bar *
228.22	103846	R/Rp 1/4	1/4	32.0	9.0	17	about 950 NI/min	0.35 bar *

* The opening pressure is dependent on the elastic force. Because of that the data can be variable about +/- 0.15 bar.