


Straight check valve

»blue series«

EASY

Art. No. 110258

Type No. 204.12

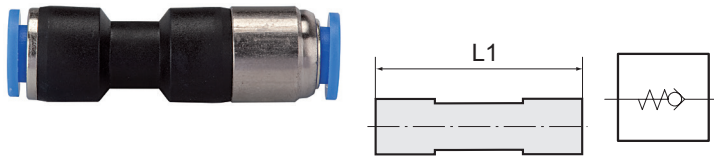

Exemplary illustration

The non-return function of these push-in fittings prevents the air from flowing back, the unidirectional design means air flow is only possible in one direction.

Discontinued product. No longer available. New product 151532 (204.12-2)

Technical data

| | |
|-----------------------|---------------------------------|
| Working pressure | 0 - 10 bar |
| Min. opening pressure | 0.2 bar |
| Temperature range | 0 to 60 °C |
| Series | Blue series |
| Material | Plastic and nickel-plated brass |
| Medium | Compressed air |
| Sealant | NBR |
| Sleeve | Plastic blue |
| Applications | Compressed air systems |
| Recommended hose | PU or PA (nylon) |
| Version | With plug connection |
| For tube O.D. | 12 mm |
| L1 | 64.0 mm |

The suitability test for the use with alternative specifications is the user's responsibility.


Commercial data

| | |
|-------------------------|------------------|
| Customs tariff number | 39174000 |
| Country of origin | CN |
| eCl@ss 5.1.4 | 27292001 |
| eCl@ss 9.0 | 27292001 |
| UNSPSC_Code_v190501 | 40141603 |
| UNSPSC_CodeDesc_v190501 | Pneumatic valves |

Material informations

| | |
|----------------------------|-------------------------|
| REACH SVHC1 substance name | lead |
| CAS no. SVHC 1 | 7439-92-1 |
| RoHS materials notice | RoHS compliant |
| REACH Info | contains SVHC substance |

Dimensions

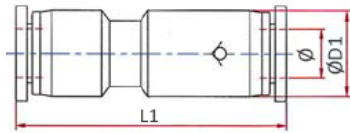

| For tube O.D. | L1 | D1 |
|---------------|------|------|
| mm | mm | mm |
| 12 | 64.0 | 21.5 |