


Plastic silencer

with granular filling

EASY

Art. No. 113381

Type No. 577-6



Exemplary illustration

With granular filling, self-cleaning.

The spherical shape of the granules allows very fine dust to escape in addition to air.

Higher blow-off rate.

Technical data

| | |
|-----------------------|--------------|
| Operating pressure | 0 - 12 bar |
| Operating temperature | -20 to 70 °C |
| Muffling material | ABS Plastic |
| Housing | POM Plastic |
| Thread | G 1 |
| A | 16 mm |
| B | 110,5 mm |
| C | 48 mm |
| Noise level at 4 bar | 85 dB |
| Noise level at 6 bar | 90 dB |


Commercial data

| | |
|-------------------------|---------------------|
| Customs tariff number | 84819000 |
| Country of origin | IT |
| eCl@ss 5.1.4 | 27299223 |
| eCl@ss 9.0 | 27299223 |
| UNSPSC_Code_v190501 | 27131609 |
| UNSPSC_CodeDesc_v190501 | Pneumatic silencers |


Material informations

| | |
|----------------------------|----------------------------|
| REACH SVHC1 substance name | no |
| CAS no. SVHC 1 | no CAS No. |
| RoHS materials notice | RoHS compliant |
| REACH Info | no SVHC substance included |

Flow chart

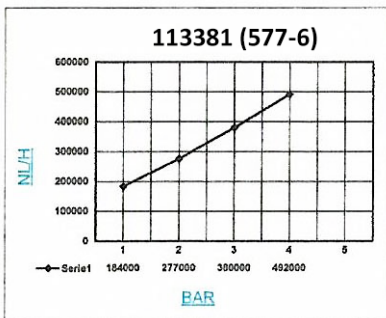

Dimensions

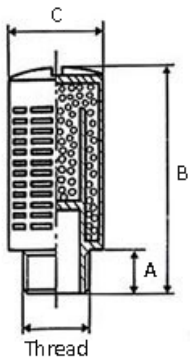

| Thread | A mm | B mm | C mm |
|--------|---------|---------|---------|
| G 1 | 16 | 110,5 | 48 |