


For special PVC pneumatic hose.

Male connector aluminium (swivel nut plastic) 11.0413/0 to 11.0421/1 and 11.0425/0,
 Male connector all-aluminium 11.0421/2 to 11.0421/3 and 11.0425/1 to 11.0425/2

Working pressure: -0,95 to 15 bar
 Medium: Air
 Operating temperature: -15 °C to +70 °C
 Connecting nut, plastic: Material POM

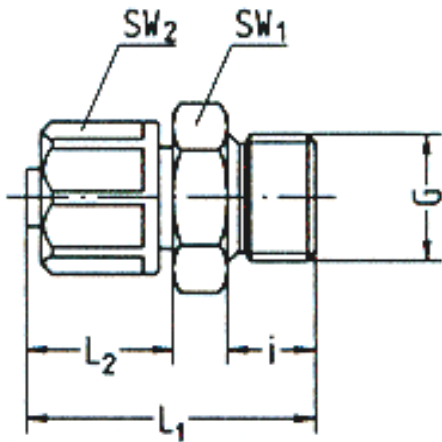

11.0421/1

For special PVC pneumatic hose, aluminium/plastic

Art. No.	Ident No.	Thread	for PVC hose	SW1 mm	SW2 mm	I mm	L1 mm	L2 mm
11.0413/0	113819	G 1/8	4x6.2	14	13	6.5	24.0	13.0
11.0414/1	113820	G 1/8	6x8.2	14	15	6.5	27.0	14.0
11.0416/1	113821	G 1/4	4x6.2	17	13	8.0	27.0	13.0
11.0417/1	113822	G 1/4	6x8.2	17	15	8.0	29.0	14.0
11.0418/1	113823	G 1/4	8x10.2	17	16	9.0	30.0	16.0
11.0419/1	113824	G 1/4	9x11.6	17	19	9.0	33.0	17.0
11.0420/1	113825	G 3/8	6x8.2	19	15	9.0	29.0	14.0
11.0421/0	113826	G 3/8	8x10.2	19	16	9.0	31.0	16.0
11.0421/1	113827	G 3/8	9x11.6	19	19	10.0	34.0	17.0
11.0421/2	113828	G 3/8	10x12.5	19	19	10.0	35.0	19.5
11.0421/3	113829	G 3/8	13x17.6	24	24	10.5	35.0	21.0
11.0425/0	113830	G 1/2	8x10.2	24	16	11.0	33.0	16.0
11.0425/1	113831	G 1/2	10x12.5	24	19	11.0	37.0	19.5
11.0425/2	113832	G 1/2	13x17.6	24	24	12.5	38.0	21.0